MITSUBISHI ELECTRIC
PRESENTATION PRODUCTS

SP-461V
Optional Accessory Speakers for LDT461V LCD Monitor

Part Number	SP-461V *(designed for LDT461V)*
Frequency Response	120Hz – 20kHz
Power	7W + 7W @ 80hms with 10% THD
Dimensions	3.7” (W) x 26.1” (H) x 3.4” (D)
Weight	3.1 lbs *(net)*
Contents	Speakers (2), Speaker wire (2), Mounting brackets (4), Speaker screws (12), Quick Start Guide

Follow these steps to connect the speakers to your LCD monitor:

1. Turn off the power switch on the LCD.
2. Screw appropriate mounting brackets into the appropriate position on each speaker (2 brackets per speaker) using black screws. Figure 1. (2 screws per bracket.)
3. Screw mounting brackets / speakers to the LCD using one (1) black screw per bracket. Figure 2.
4. Once both speakers are attached to the LCD, connect the speaker wires to the terminals on the LCD and then to the terminals on attached speakers. Figure 3.
5. Turn the LCD power on.

Figure 1

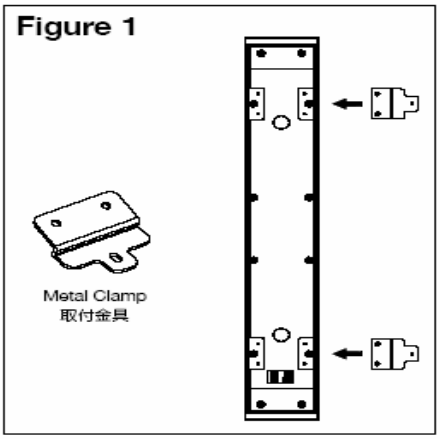

Figure 2

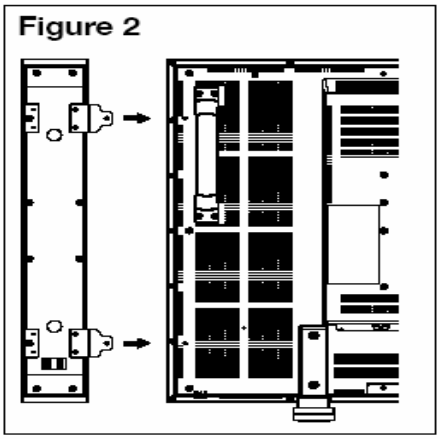

Figure 3

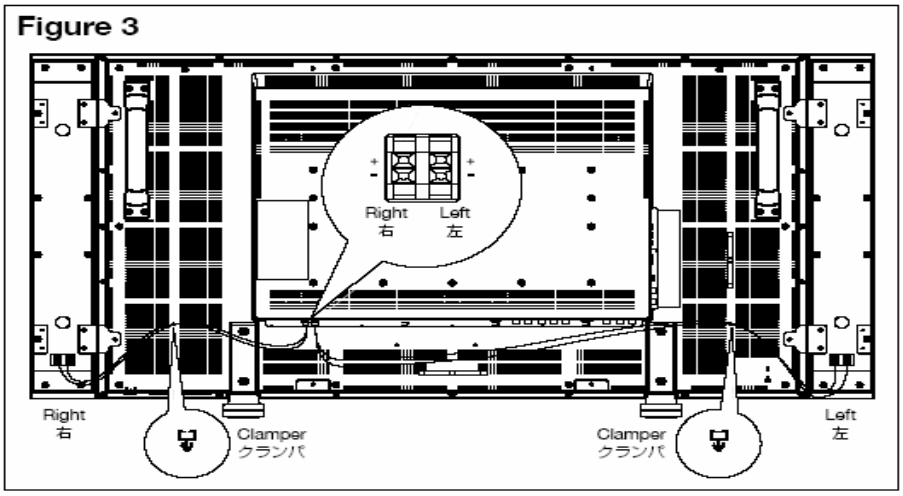

Mitsubishi Digital Electronics America, Inc. Presentation Products Division
9351 Jeronimo Road,
Irvine CA 92618 (888) 307-0349
ppdinfo@mdea.mea.com
www.mitsubishi-presentations.com

Technical Support
(888) 307-0309 Email:
tsupport@mdea.mea.com

Canada Mitsubishi Electric Sales Canada, Inc. Information Technology Group Markham,
Ontario (905) 475-7728

(Specifications Subject to Change)